

PRIMA

ROTARY TILLER

- Prima rotary tiller is secondary tillage implement offering best in class pulverization & hence optimum seed germination.
- Robust hitch geometry for better load distribution.
- Equipped with heavy duty multispeed gear drive (4 speed) for wider range of rotor speeds.
- Ensures excellent cutting and mixing of crop residue.



World's only rotary tiller with robust dual tubular & angular support for eliminating mechanical vibrations to almost zero.



WORLD'S NO. 1
HEAVY DUTY RANGE

WALK AROUND PRIMA



Duo cone mechanical oil seals ideal for dry & wet land operation.



Available with L&J type boron steel blades.



Helical arrangement of blades ensures less load on tractor & lesser fuel consumption.




Heavy duty trailing board.



Robust structure for heavy vibration free field operation-Tubular square pipe on front & rear with angle iron welded on both sides



Oil immersed side bearing

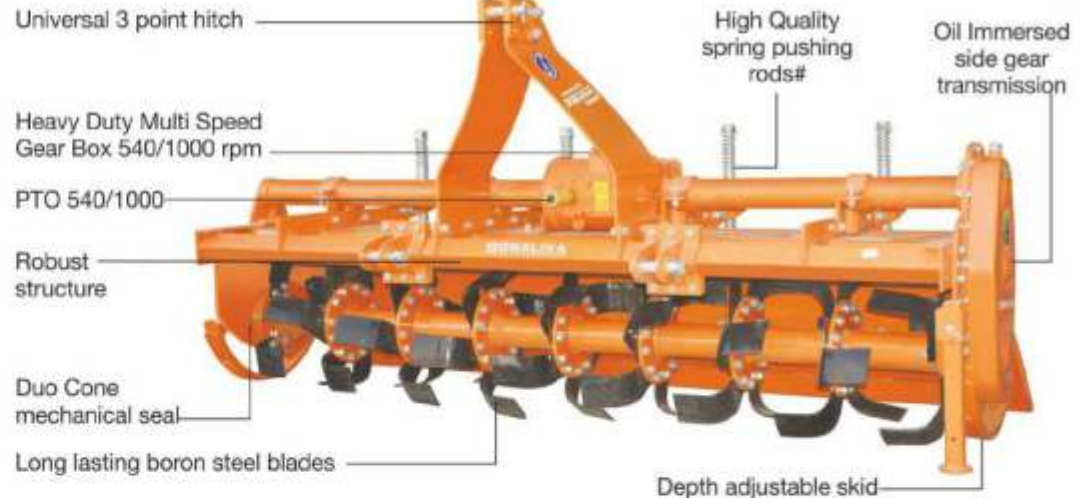

Model Name	Size (in feet)	Work Width		Total Width		Weight in Kg. Approx.	PTO Speed RPM	Blade Type			HP
		Inch	cm	Inch	cm			L Type Blade	J Type Blade	Pocket Type	
SLRMS-120	4	47.32	120.1	58.1	147.8	300	540/1000	30	X	X	30+
SLRMS-150	5	59.4	151.2	70.31	178.6	355	540/1000	36	X	X	35+
SLPMSR-5.5 (36 Blade)	5.5	66.3	168.5	77.2	196.1	415	540/1000	36	X	X	35+
SLPMSR-5.5 (39 Blade)	5.5	66.3	168.5	77.2	196.1	435	540/1000	39	X	X	40+
SLPMSR-5.5 (42 Blade)	5.5	66.3	168.5	77.2	196.1	450	540/1000	42	X	X	40+
SLPMSR-6	6	69.3	176.2	80.23	203.8	430	540/1000	42	X	X	40+
SLPMSR-7	7	69.2	201.4	90.1	229.0	450	540/1000	48	X	X	45+
SLPMSJTR-5.5	5.5	66.3	168.5	77.2	196.1	435	540/1000	X	66	X	40+
SLPMSJTR-6	6	69.3	176.2	80.23	203.8	440	540/1000	X	72	X	40+
SLPMSPTR-5.5	5.5	66.3	168.5	77.2	196.1	420	540/1000	X	X	48	40+
SLPMSPTR-6	6	69.3	176.2	80.23	203.0	430	540/1000	X	X	52	40+

ROTOR SPEED CHART FOR PRIMA

PRIMA		SIDE GEAR	
A	B	Pinion 13 Crown 25	Pinion 13 Crown 25
14	22	540	1000
16	20	160	236
17	19	179	---
19	17	224	---
20	16	250	---
15	21	143	---
21	15	280	---

Boron Steel Blades



- 20% longer life.
- Hard to break and bend.
- Saves money & time.

4 no. of damper spring for 7 feet variant.

*The Product & Specifications are subject to change / discontinue without any notice on the sole discretion of manufacturer.

SONALIKA INDUSTRIES

(A UNIT OF INTERNATIONAL CARS & MOTORS LTD.)

Works & Admin Office: Vill. Chak Gujran, Jalandhar Road, Hoshiarpur -146 022 (Pb.), India

Tel.: +91 9914934522, +91 1882-501320, Email: info@sonalikaindustries.com

WORLD'S NO. 1
HEAVY DUTY RANGE

Authorised Dealer

RU030327AA