






EXECUTE EXECUTE EXECU

WHY CHOOSE JUMBO

- Better soil inversion & soil aeration.
- Reliable hydraulic control helps to switch left & right bottom easily.
- Best suitable to use in rocky & rooted areas.
- Unique profile cut tines works perfectly in all type of soils.
- Less maintenance & enhance productivity.
- Special wear resistant boron steel blades with share point for toughest ploughing job.
- Additional furrow can be easily added and repositioned for extra clearance.

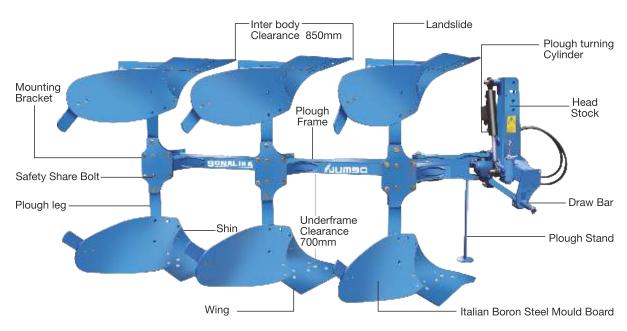

FUNCTIONALITY OF MB PLOUGH									
Crop residue Vertical cut	Overturning	Breaking of clods							
Horizontal cu	Ploughing sole Soil aeration	Soil aeration							

TECHNICAL DATA										
		Length /Width/ Height	Under Beam Clearance	Leg size	Inter Body Clearance	Working Depth		Working Width	Weigth	
Model	AH	(cm)		(mm)	(mm)	(inch)	(HP)	(cm)	(kg)	
SLRP-2 MB	2MB	192 X 123 X 153	700	80 X 25	850	Hard Soil 10–14 Soft & Medium Soil 10–16		60 ± 2	440	
SLRP-3 MB 2+1 Optional	3MB(2+1)	277 X 136 X 153				Hard Soil 10–14 Soft & Medium Soil 10–16		91 ± 2	560	

*The Product & Specifications are subject to change / discontinue without any notice on the sole discretion of manufacturer

WORLD'S NO.
HEAVY DUTY RANGE

SONALIKA INDUSTRIES

(A UNIT OF INTERNATIONAL CARS & MOTORS LTD.)

Works & Admin Office: Vill. Chak Gujran, Jalandhar Road, Hoshiarpur -146 022 (Pb.), India Tel.: +91 9914934522, +91 1882-501320, Email: info@sonalikaindustries.com

Authorised Dealer

R0039095AA